

BERKOL® Presses

Bräcker offers you under the tradename BERKOL® the appropriate presses for all Alupress top roller covers in a spinning mill.

Pressing the Alupress covers correctly onto the top rollers is a pre-requisite for the production of excellent yarn.

Thanks to the extreme accuracy and safety of the BERKOL® presses fault-free and economical working is guaranteed.



More than just Rubber

APH50-H500

Electro-hydraulic press for fitting and removing long Alupress covers on the top rollers of preparatory machines and combers. The tools can be stored cleanly in the front-mounted drawers in the work bench.

- SAFE
- COMFORTABLE
- PRODUCTIVE




APH50-H500EV

Electro-hydraulic press for fitting and removing long Alupress covers on the top rollers of preparatory machines and combers.

Correspond to the simple design of the APH50-H500 with no work bench and tool drawers is ideal for smaller quantities.

- NARROW
- ECONOMICAL
- FLEXIBLE

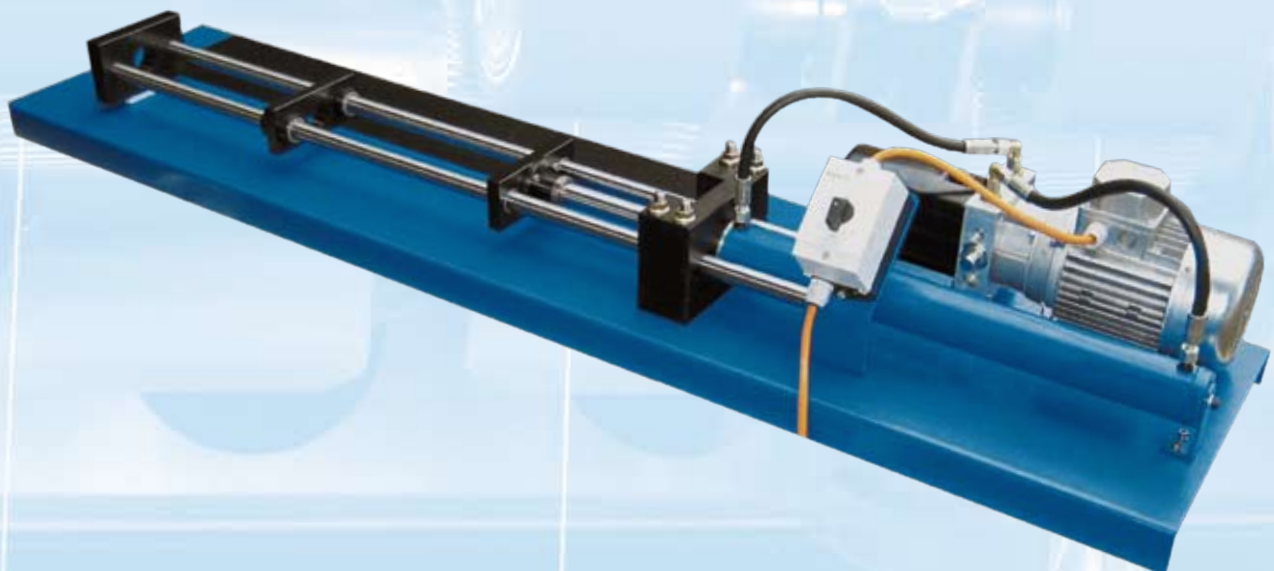



PP125-H100

Pneumatic press for fitting and removing short Alupress covers on ring spinning and flyer top rollers and OE delivery top rollers.

- COMFORTABLE
- QUICK
- SPACE-SAVING

HP 86

Hand press for fitting and removing short Alupress covers on ring spinning and flyer top rollers and OE delivery top rollers.

- SIMPLE
- ROBUST
- INDEPENDENT



Straightening press

Straightening press for straightening top and bottom rollers with two moveable V-blocks and a height-adjustable die.

- ACCURATE
- POWERFUL
- ESSENTIAL

Comparison table BERKOL® Presses

	APH50-H500	APH50-H500EV	PP125-H100	HP86
System	electro-hydraulic		pneumatic	manual
Application	all presses are only designed for Alupress covers			
Operating range Press range Core diameter Cover diameter	up to 490 mm up to 35 mm up to 150 mm	up to 490 mm up to 35 mm up to 80 mm	18–70 mm 18, 19 + 30 mm 150 mm	18–70 mm 18 + 19 mm 150 mm
Operating pressure	150 bar	150 bar	6–10 bar	
Press pressure	max. 29'000 N	max. 29'000 N	at 6 bar: 5'500 N at 10 bar: 9'700 N	– –
Motor connection	220 to 250 Volt or 380 to 440 Volt			
Motor power	3.5 kW	0.75 kW	–	–
Safety	conforms to CE		two-hand operation	–
Press off	possible			
Tool drawers	yes	no		
Maintenance	extremely low maintenance			
Dimensions Width Depth Height	1810 mm 370 mm 1070 mm	1800 mm 450 mm 300 mm	400 mm 230 mm 780 mm	100 mm 250 mm 550 mm
Weight	242 kg	92 kg	40 kg	15 kg
Spare parts	from store			
Pressing tools Standard Special	from store Special tools as per sample or drawing can be supplied on short delivery times			
Country of origin	Switzerland			

Bräcker

Bräcker AG

Obermattstrasse 65
8330 Pfäffikon-Zürich
Switzerland
Tel. +41 44 953 14 14
Fax +41 44 953 14 90
sales@bracker.ch
www.bracker.ch

Bräcker SAS

132, rue Clemendeau
68920 Wintzenheim
Tél. +33 3 89 27 00 07
Fax +33 3 89 27 52 30
sales@bracker.fr
www.bracker.fr

Bräcker S.R.L. – Italy

sales@bracker.it

Agencies see
www.bracker.ch



Subject to modification
without prior notice