



THE THERMO TB

Bräcker


WORLD OF PERFORMANCE

Bräcker THERMO TB

Characteristics


- Ball bearing steel 100 CR6 core hardened
- Surface hardness : HV1 ~ 850
- Surface roughness : Ra 0.2 - 0.4 μm

Core zone :
Fine and hard
martensite structure

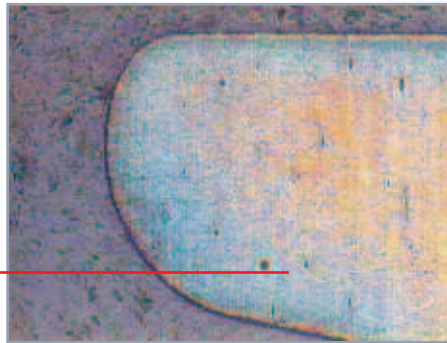


Micro structure

- Surface : special fine phosphatation finish, greyish-black
- Good rust protection
- Normal running-in procedure

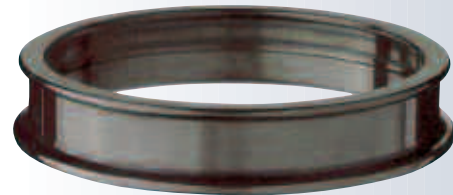

Application

- Universal ring for medium performances
- Suitable for all types of fibres
- Covers whole range of counts, especially medium and coarse counts

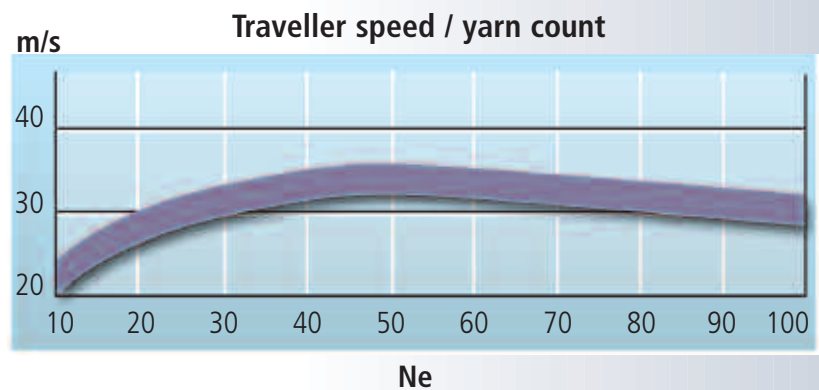

Bräcker

Bräcker AG
Obermattstrasse 65
CH-8330 Pfäffikon-Zürich
Switzerland
Tel +41 44 953 14 14
Fax +41 44 953 14 90
E-mail sales@bracker.ch
Web www.bracker.ch

Bräcker SAS
132, rue Clemenceau
FR-68920 Wintzenheim
France
Tel +33 3 89 27 00 07
Fax +33 3 89 27 52 30
E-mail sales@bracker.fr
Web www.bracker.fr

Bräcker S.R.L. - Italy
E-mail sales@bracker.it

Bracker de Mexico SA de C.V.
E-mail brackerm@avantel.net

Agencies see
www.bracker.ch



Subject to modification
without prior notice